

8757 DUKANE

ImagePro 8757 Premium-quality DLP projector

A new way of thinking about projection


The Dukane ImagePro 8757 offers something you haven't seen before: a truly intuitive set of controls and menus plus color-coded cables and connectors. Most people can use it with no training and not even a glance at the manual.

This premium-quality, full-featured DLP projector is ideal for larger conference rooms or classrooms where you

want to keep the lights on. Use it as a portable or mount it on the ceiling.

Key features:

- •2500-lumen brightness
- Vibrant color images
- Sharp XGA resolution, with resizing to SXGA
- Ethernet connections for full projector control and management from a PC over your existing network
- Full-function remote has mouse/cursor control and laser pointer (all controls also on the projector)
- The versatility of 2 computer and 3 video inputs
- Compatible with all types of video, including digital HDTV. Component input for the best digital video.
- Monitor output for use with desktop computer's monitor
- 1.4X zoom lens for flexible projector placement
- 4W stereo audio (2 speakers) plus audio outputs for use with external sound system
- Very quiet: the only thing you'll hear is your message.

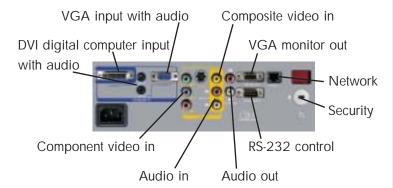

DUKANE

Dukane Corporation Audiovisual Products Division 2900 Dukane Drive St. Charles, Illinois 60174 800-676-2485 or 2486 toll-free 630-584-5156 fax

avsales@dukane.com e-mail www.dukane.com

Specifications

Brightness

Resolution

Contrast

LCD Type 0.7" DMD.

> Digital Micromirror Device DLP by Texas Instruments, XGA

2500 ANSI lumens

1024 x 768 pixels (H X V)

Scanning Frequency fh 50-118 kHz, fv 50-85 Hz

Lens Manual zoom 1.4X 1:1.5 Image diagonal Lens Throw Ratio

to throw distance

Digital, +/- 20 degrees **Keystone Correction** Aspect Ratio 4:3, 16:9, selectable Computer SVGA, VGA, XGA, SXGA

Compatibility PC and Mac

Video Compatibility NTSC, PAL, SECAM, s-video, HDTV (1080i, 720p, 480p,

576p)

Image Control Freeze function, electronic magnification and pan

Mouse Control Using USB Front/rear/ceiling **Projection Modes** Color Reproduction 24 bit (16.7 million)

250W UHP Lamp 1500 hours (typical) Lamp Life

Audio Stereo, 2 speakers x 4 watt Throw Distance 5 to 35 ft.

Screen Size 33 to 290 in. Inputs, Video (1) Component, RCA x 3

> (1) Min DIN 4-pin, s-video (1) RCA, composite video (1) Audio, stereo, RCA x 2

(1) VESA, D-sub 15 pin

(1) Audio, stereo mini jack

(1) DVI, M1D/A

w audio and USB mouse Monitor: 15 pin, D-sub Control: RS-232, 9 pin

Network RJ45, ethernet, ICP/IP Security Kensington lock slot Fan Level 35dB, ultra quiet Power

AC 100-240V, 50/60 Hz,

350 watt

Size (WxHxD) 13.8" x 4.3" x 12.8"

Weight 9.4 lbs. Shipping Weight 20 lbs.

Carton Size Accessories Included

Inputs, Computer

Outputs

20.5" x 19" x 12.5" Remote control, batteries, power cord,

RCA audio/video cable, DVI cable with USB, audio cable (stereo mini), operators manual and molded carrying case. UL/CSA, FCC Class A

Safety Optional Accessories

Lamp 456-231; rolling briefcase: 185-406

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 24 month

Peace-of-Mind Loaner Program.